


SECTION 024116 STRUCTURE DEMOLITION

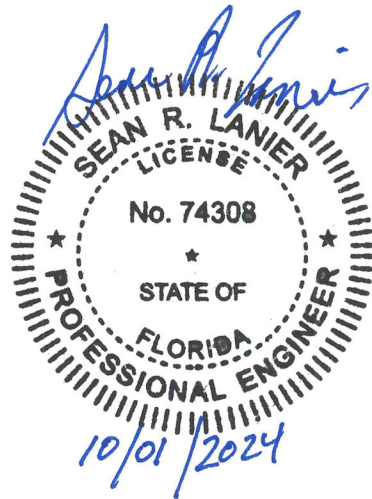

SECTION 024116 STRUCTURE DEMOLITION

PART 1 GENERAL

1.1 SUMMARY

- A. This Section includes the following,
 - 1. Demolition and removal of buildings and site improvements.
 - 2. Asbestos abatement must be completed prior to demolition services.
 - 3. Disconnecting, capping or sealing, and abandoning in place or removing site utilities.

1.2 DEFINITIONS

- A. Demolish: Completely remove and legally dispose of offsite.
- B. Recycle: Recovery of demolition waste for subsequent processing in preparation for reuse.

1.3 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.
- B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to City that may be uncovered during demolition remain the property of City.
 - 1. Carefully salvage in a manner to prevent damage and deliver to location specified by the City.

1.4 SUBMITTALS

- A. Qualification Data: For refrigerant recovery technician.
- B. Proposed Protection Measures: Submit informational report, including drawings, that indicates the measures proposed for protecting individuals and property, for environmental protection, for dust control and for noise control. Indicate proposed locations and construction of barriers.
- C. Schedule of Building Demolition Activities: Indicate the following:
 - 1. Detailed sequence of demolition work including the abatement services, with starting and ending dates for each activity.
 - 2. Temporary interruption of utility services.
 - 3. Shutoff and capping or rerouting of utility services.
- D. Building Demolition Plans: Drawings are not available.

Exhibit B

1. Locations of temporary protection and means of egress for adjacent occupied buildings.

Exhibit B

- E. Pre-demolition Photographs or Video: Show existing conditions of adjoining construction and site improvements, including finish surfaces, that might be misconstrued as damage caused by building demolition operations. Submit before the Work begins.
- F. Landfill Records: Indicate receipt and acceptance of hazardous wastes by a landfill facility licensed to accept hazardous wastes.
- G. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

1.5 QUALITY ASSURANCE

- A. Refrigerant Recovery Technician Qualifications: Certified by EPA approved certification program.
- B. Regulatory Requirements: Comply with governing EPA notification regulations before beginning demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- C. Standards: Comply with ANSI A10.6 and NFPA 241.
- D. Pre-demolition Conference: Conduct conference at Project site.

1.6 PROJECT CONDITIONS

- A. Buildings to be demolished will be vacated and their use discontinued before start of the Work.
- B. Buildings immediately adjacent to demolition area will be occupied. Conduct building demolition so operations of occupied buildings will not be disrupted.
 - 1. Provide not less than 72 hours' notice of activities that will affect operations of adjacent occupied buildings.
 - 2. Maintain access to existing streets, walkways, exits, and other facilities used by occupants of adjacent buildings and the public.
 - a. Do not close or obstruct streets, walkways, exits, or other facilities used by the public or occupants of adjacent buildings without written permission from authorities having jurisdiction.
- C. City assumes no responsibility for buildings and structures to be demolished.
 - 1. Conditions existing at time of inspection for bidding purpose will be maintained by City as far as practical.
- D. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.

Exhibit B

1. Hazardous materials will be removed by Demolition Contractor before start of the demolition work.

Exhibit B

2. If additional materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect/Engineer and City. Hazardous materials will be removed by Demolition Contractor under this contract.
- E. Hazardous Materials: Hazardous materials are present in buildings and structures to be demolished. A report on the presence of hazardous materials is on file for review and use. Examine report to become aware of locations where hazardous materials are present.
1. Hazardous material remediation is specified elsewhere in the Contract Documents.
 2. Do not disturb hazardous materials or items suspected of containing hazardous materials except under procedures specified elsewhere in the Contract Documents.
 3. City will provide material safety data sheets for materials that are known to be present in buildings and structures to be demolished because of building operations or processes performed there.
- F. Onsite storage or sale of removed items or materials is not permitted, unless otherwise is indicated.

1.7 COORDINATION

- A. Arrange demolition schedule so as not to interfere with City's onsite operations or operations of adjacent occupied buildings.

PART 2 PRODUCTS (Not Used)

2.1 SOIL MATERIALS

- A. Satisfactory Soils: Comply with requirements in Division 31 Section "Earth Moving."

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that utilities have been disconnected and capped before starting demolition operations.
- B. Review Project Record Documents of existing construction provided by City. City does not guarantee that existing conditions are same as those indicated in Project Record Documents.
- C. Verify that hazardous materials have been remediated before proceeding with building demolition operations.

3.2 PREPARATION

- A. Refrigerant: Remove refrigerant from mechanical equipment according to 40 CFR 82 and

Exhibit B

regulations of authorities having jurisdiction before starting demolition.

- B. Existing Utilities: Locate, identify, disconnect, and seal or cap off indicated utilities.

Exhibit B

serving buildings and structures to be demolished.

1. Contractor will arrange to shut off indicated utilities.
 2. Disconnect underground water services at the City water main, cut and seal water service pipes to meet Florida Building Code plumbing requirements.
 3. Coordinate with Ocala Electric/Duke Energy/SECO or applicable electrical utility to disconnect electrical services, remove all overhead electrical cables with its supports.
 4. Coordinate with TECO or applicable gas utility to disconnect gas service.
 5. Obtain Demolition Permit from the City of Ocala and all necessary approvals from local or state agencies.
 6. Arrange to shut off indicated utilities with utility companies.
 7. If removal, relocation, or abandonment of utility services will affect adjacent occupied buildings, then provide temporary utilities that bypass buildings and structures to be demolished and that maintain continuity of service to other buildings and structures.
- C. Existing Utilities: Refer to Division 22 and 26 Sections for shutting off, disconnecting, removing, and sealing or capping utilities. Do not start demolition work until utility disconnecting and sealing have been completed and verified in writing.

3.3 PROTECTION

- A. Existing Facilities: Protect adjacent walkways, loading docks, building entries, and other building facilities during demolition operations. Maintain exits from existing buildings.
- B. Existing Utilities: Maintain utility services to remain and protect from damage during demolition operations.
1. Do not interrupt existing utilities serving adjacent occupied or operating facilities unless authorized in writing by City and authorities having jurisdiction.
 2. Provide temporary services during interruptions to existing utilities, as acceptable to City and authorities having jurisdiction.
 - a. Provide at least 72 hours' notice to occupants of affected buildings if shutdown of service is required during changeover.
- C. Temporary Protection: Erect temporary protection, such as walks, fences, railings, canopies, and covered passageways, where required by authorities.
1. Protect existing site improvements, appurtenances, and landscaping to remain.
 2. Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 3. Provide protection to ensure safe passage of people around building demolition area and to and from occupied portions of adjacent buildings and structures.
- D. Remove temporary barriers and protections where hazards no longer exist. Where open excavations or other hazardous conditions remain, leave temporary barriers and protections in place.

Exhibit B

3.4 DEMOLITION, GENERAL

- A. General: Demolish indicated existing building completely. Use methods required to complete the Work within limitations of governing regulations and as follows:
 - 1. Do not use cutting torches until work area is cleared of flammable materials.

Exhibit B

- Maintain portable fire suppression devices during flame cutting operations.
 2. Maintain fire watch during and for at least 48 hours after flame cutting operations.
 3. Locate building demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
 4. Maintain adequate ventilation when using cutting torches.
- B. Engineering Surveys: During demolition, perform surveys to detect hazards that may result from building demolition activities.
- C. Site Access and Temporary Controls: Conduct building demolition and debris removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
1. Do not close or obstruct streets, walks, walkways, or other adjacent occupied or used facilities without permission from City and authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by authorities having jurisdiction.
 2. Use water mist and other suitable methods to limit spread of dust and dirt. Comply with governing environmental protection regulations. Do not use water when it may damage adjacent construction or create hazardous or objectionable conditions, such as ice, flooding, and pollution.
- D. Explosives: Use of explosives is not permitted.

3.5 DEMOLITION BY MECHANICAL MEANS

- A. Proceed with demolition of structural framing members systematically, from higher to lower level. Complete building demolition operations above each floor or tier before disturbing supporting members on the next lower level.
- B. Below Grade Construction: Abandon foundations and footings will remain in place. Other below grade construction shall be removed completely.
- C. Existing Utilities: Demolish existing utilities and below grade utility structures. Abandon utilities outside this area. Fill abandoned utility structures with satisfactory soil materials.

3.6 SITE RESTORATION

- A. Below Grade Areas: Rough grade below grade areas ready for further excavation or new construction.
- B. Below Grade Areas: Completely fill below grade areas and voids resulting from building demolition operations with satisfactory soil materials.
- C. Site Grading: Uniformly rough grade area of demolished construction to a smooth surface, free from irregular surface changes. Provide a smooth transition between adjacent existing grades and new grades and seed.

3.7 REPAIRS

Exhibit B

- A. Promptly repair damage to adjacent buildings caused by demolition operations.
- B. Promptly repair any sidewalk damage caused by the demolition operation.

Exhibit B

3.8 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site. for recycling and disposal of demolition waste.
- B. Remove demolition waste materials from Project site and legally dispose of them in an EPA approved landfill acceptable to authorities having jurisdiction.
 - 1. Do not allow demolished materials to accumulate onsite.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
 - 3. Do not burn demolished materials.

3.9 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by building demolition operations. Return adjacent areas to condition existing before building demolition operations began.

END OF SECTION 024116