



YOUR TAXES AT WORK

PROJECT NAME 1

PROJECT NAME 2

PROJECT ITB# CIP/XXXXXX

CITY OF OCALA, FLORIDA

CITY COUNCIL:

NAME
(COUNCIL PRESIDENT)
DISTRICT 1

NAME
DISTRICT 2

NAME
DISTRICT 3

NAME
(COUNCIL PRESIDENT PRO-TEM)
DISTRICT 4

NAME
DISTRICT 5

NAME
MAYOR

CITY OF OCALA

**CAPITAL IMPROVEMENT
PROJECTS DIVISION**

CONTRACTOR
(NAME)

PROJECT COST
(BID AMOUNT)

START DATE
(MONTH - DAY, YEAR)

COMPLETION DATE
(MONTH - DAY, YEAR)

**FOR PROJECT INFORMATION CONTACT:
CAPITAL IMPROVEMENT PROJECTS DIVISION
352-629-8419**



CITY ENGINEER'S OFFICE
1805 NE 30TH AVE, BLDG #600
OCALA, FLORIDA 34470

*CITY OF OCALA
STANDARD DETAILS
FOR CONSTRUCTION*

*PROJECT
CONSTRUCTION SIGN*


SECTION:
GENERAL

G-31A

REVISION DATE:
JAN 2023

PROJECT SIGN CONSTRUCTION DETAIL

2"x4" WOOD FRAME
SCREWED TO THE
BACK SIDE OF
PLYWOOD SIGN

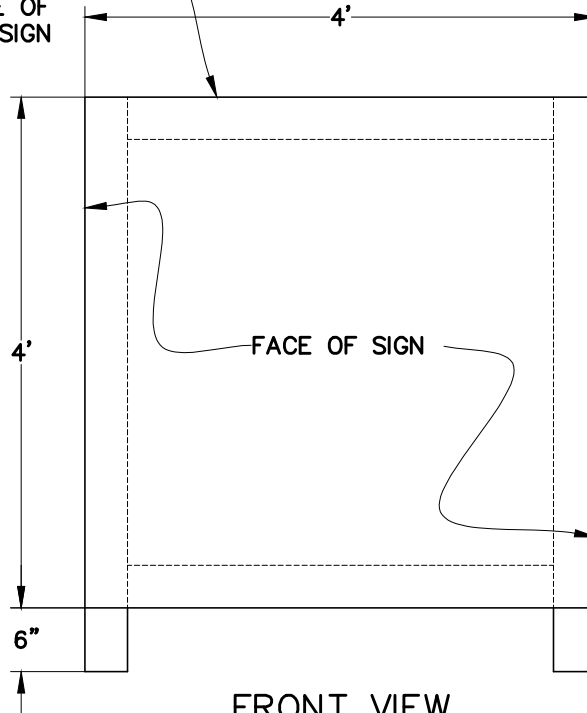

FRONT VIEW

NOTE:

- 3/4" PLYWOOD & FRAME TO BE PAINTED WHITE ON ALL SIDES.
- LETTERING INTERMEDIATE GRADE VINYL OR AN APPROVED EQUIVALENT.
- BORDER LINES TO BE BLACK, MIN 1/2" WIDE, INSERT 1" FROM BOARD EDGE.
- TOP & BOTTOM WARNING PANELS SHALL BE 6" RETRO-REFLECTIVE "ORANGE" PAVEMENT MARKING TAPE: MUTED "COLOR CODE"

HINGE SIGNS TOGETHER AT TOP
TO ALLOW THEM TO BE FOLDED
TOGETHER FOR PORTABILITY

3/4" MARINE PLYWOOD FACE

BOTTOM OF
PLYWOOD FACE

6"

60°

SIDE VIEW

WOOD OR METAL BRACE ON BOTH
SIDES THAT CAN BE DETACHED OR
BROKEN DOWN TO ALLOW SIGNS TO
FOLD TOGETHER FOR PORTABILITY

2"x4" WOOD FRAME

3/4" MARINE PLYWOOD FACE



CITY ENGINEER'S OFFICE
1805 NE 30TH AVE, BLDG #600
OCALA, FLORIDA 34470

CITY OF OCALA
STANDARD DETAILS
FOR CONSTRUCTION

CONSTRUCTION
SIGN FRAME

SECTION:
GENERAL

G-31B

REVISION DATE:
JAN 2023